



## eX-S110 Fast Ethernet Extenders 10/100 Ethernet Copper Extender



- Extends 10/100Base-TX Ethernet up to 10,000 feet ( 3 KM ) over 2-wire 24 AWG twisted pair
- Hi-Speed – up to 200+ mbps aggregate line rate
- Transparent operation for all Ethernet protocols including 802.1Q VLAN packets and IP video compression schemes
- One or four 10/100 Ethernet ports
- Advanced features: Link Pass-Through\*, Interlink Fault Feedback\*, Plug and Play, Auto-MDIX and Loopback

When you need to extend Ethernet services beyond the general IEEE 802.3 limits of 328ft / 100m, and new fiber cabling is cost prohibitive, **Ethernet Extenders** are the perfect solution. Perle Ethernet Extenders **transparently extend** up to four 10/100 **Ethernet connections across copper wiring**. Use **single twisted pair ( CAT5/6/7 )**, **coax or any existing copper wiring** previously used in alarm circuits, E1/T1 circuits, RS-232, RS-422, RS-485, CCTV and CATV applications.

These simple and effective point to point Ethernet Copper Extenders are perfect for commercial buildings, residential units, hospitality environments, connecting a remote office or private-network backbone to a corporate LAN ... anywhere you need Ethernet communication links between separated LANs or LAN devices (i.e. PCs, digital sensors, VoIP phones, WiFi APs, IP cameras and more).

Perle's advanced features such as Link Pass-Through\*, Interlink Fault Feedback\*, and Loopback allow Network administrators to "see everything" for more efficient troubleshooting and less on-site maintenance. These cost and time saving features, along with a lifetime warranty and free worldwide technical support, make **Perle Ethernet Extenders** the smart choice for IT professionals. **eX-S110 Ethernet Extenders** are also available with support for [Extended Temperature ranges](#) and [high-density applications](#).

### eX-S110 Fast Ethernet Extender Features

Extend Ethernet over twisted pair	Extend an Ethernet link over category 5e, 6 and 7 cabling up to 10,000 feet ( 3 km )
Extend Ethernet over Coaxial cable	Extend an Ethernet link over 75 ohm coaxial cable
Hi-Speed Performance	Utilizes second generation VDSL2 technology ( ITU-T Recommendation G.993. ). When operating under "Profile 30a", Perle Ethernet Extenders can provide an aggregate VDSL line rate capability of over 200 mbps.  <i>Actual distance and performance may vary depending on the type / gauge and condition of the wire used.</i>
Plug and Play operation	Perle Ethernet Extenders will automatically configure your VDSL interlink connection. The CO/CPE peer association will be determined automatically by the Ethernet Extender. No need to set CO / CPE VDSL pairing.  Once a connection is made, both ends will automatically adjust relevant VDSL parameters to optimize the level of bandwidth possible across the copper link.
Link Pass-Through*	With Link Pass-Through the state of the 10/100Base-TX Ethernet connection is "passed through" the VDSL link to the 10/100Base-TX Ethernet connection on its remote peer. A managed switch on the remote end can then report the state (link up or link down) to its network management system so that any errors can be detected and recovered early.  Competitive Ethernet extenders without this feature will never detect or report any error conditions.
Interlink Fault Feedback*	Similar to the Link Pass-Through feature, a loss of VDSL link will drop the 10/100 Ethernet ports on each end until the link recovers.
Auto-Negotiation	The Ethernet Extender supports auto negotiation on the 10/100Base-TX interface.

Auto-MDIX	Auto-MDIX (Automatic Medium-Dependent Interface crossover) detects the signaling on the 10/100 Ethernet RJ45 interface and determines the type of cable connected (straight-through or crossover) and automatically adopts a compatible pinout.
Fixed Speed and Duplex	Some Ethernet equipment require a fixed speed and duplex be used or cannot auto-negotiate. By disabling Auto-Negotiation on the Ethernet Extender, a fixed speed of 10 or 100 mbps as well as Full or half Duplex can be configured through DIP switches.
VLAN	Transparent to tagged VLAN ( 802.1Q ) packets.
Transparent to IP Video compression protocols	Fully transparent to such IP video compression schemes such as MPEG-4, H.264 and MJPEG.
Power Strain Relief strap	A strain relief strap is provided to ensure a solid and secure power connection to the Ethernet Extender. Ideal for areas that may be exposed to vibration.
Loopback	When enabled, will perform a loopback on the copper VDSL Interlink.

\*Available on 1 port models.

Ethernet	eX-1S110	eX-4S110																																																																																																																																					
Port	1 port RJ45 – 10/100 Base-TX - Shielded	4 port RJ45 – 10/100 Base-TX - Shielded																																																																																																																																					
Auto-MDIX	Auto-MDIX enables proper operation with either straight-through or crossover cabling																																																																																																																																						
Distance	Distance up to 100 meters ( 328 feet ) as per IEEE 802.3																																																																																																																																						
Maximum Frame Size	1522 bytes																																																																																																																																						
<b>VDSL – Interlink</b>																																																																																																																																							
RJ45, BNC, Terminal Block	<p><i>TIP and RING are polarity insensitive. Surge suppression of 400 volts between TIP and RING</i>                      Choice of RJ45, BNC or terminal block models for VDSL link connector</p> <ul style="list-style-type: none"> <li>■ RJ45 – RING pin 4, TIP pin 5 (TIA 568 A/B)</li> <li>■ BNC – Coaxial 75 ohm cable with BNC connector</li> <li>■ Terminal Block – 2 position screw connectors for use with twisted pair telephone cabling</li> </ul>																																																																																																																																						
Cabling	Ethernet Extenders must be connected in pairs using unconditioned wire between 19 ( 0.9 mm ) and 26 AWG ( 0.44 mm ). Circuits that run through signal equalization equipment are not permitted.																																																																																																																																						
VDSL2 Line Rate/Reach	<p>Actual distance and rates experienced will depend on condition and gauge of wire used. This Rate/Reach table applies to 24 AWG ( 0.5 MM ) twisted pair wiring on RJ45 (RJ) and terminal block (TB) models.</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">High Speed Asymmetric</th> </tr> <tr> <th colspan="2">Reach ( Distance )</th> <th colspan="2">VDSL Rate ( Mbps )</th> </tr> <tr> <th>feet</th> <th>meters</th> <th>Downstream</th> <th>Upstream</th> </tr> </thead> <tbody> <tr><td>250</td><td>76</td><td>195</td><td>105</td></tr> <tr><td>500</td><td>152</td><td>182</td><td>98</td></tr> <tr><td>1000</td><td>305</td><td>141</td><td>63</td></tr> <tr><td>1500</td><td>457</td><td>93</td><td>45</td></tr> <tr><td>2000</td><td>610</td><td>66</td><td>30</td></tr> <tr><td>2500</td><td>762</td><td>53</td><td>12</td></tr> <tr><td>3000</td><td>914</td><td>44</td><td>8</td></tr> <tr><td>3500</td><td>1000</td><td>36</td><td>5</td></tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">High Speed Symmetric</th> </tr> <tr> <th colspan="2">Reach ( Distance )</th> <th colspan="2">VDSL Rate ( Mbps )</th> </tr> <tr> <th>feet</th> <th>meters</th> <th>Downstream</th> <th>Upstream</th> </tr> </thead> <tbody> <tr><td>250</td><td>76</td><td>190</td><td>110</td></tr> <tr><td>500</td><td>152</td><td>180</td><td>105</td></tr> <tr><td>1000</td><td>305</td><td>122</td><td>83</td></tr> <tr><td>1500</td><td>457</td><td>84</td><td>50</td></tr> <tr><td>2000</td><td>610</td><td>64</td><td>26</td></tr> <tr><td>2500</td><td>762</td><td>53</td><td>10</td></tr> <tr><td>3000</td><td>914</td><td>42</td><td>7</td></tr> <tr><td>3500</td><td>1000</td><td>36</td><td>4</td></tr> </tbody> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="4">Long Reach Symmetric</th> </tr> <tr> <th colspan="2">Reach ( Distance )</th> <th colspan="2">VDSL Rate ( Mbps )</th> </tr> <tr> <th>feet</th> <th>meters</th> <th>Downstream</th> <th>Upstream</th> </tr> </thead> <tbody> <tr><td>250</td><td>76</td><td>76</td><td>57</td></tr> <tr><td>1000</td><td>305</td><td>74</td><td>49</td></tr> <tr><td>2500</td><td>762</td><td>52</td><td>10</td></tr> <tr><td>4000</td><td>1219</td><td>28</td><td>2</td></tr> <tr><td>5500</td><td>1676</td><td>15</td><td>1.5</td></tr> <tr><td>7000</td><td>2134</td><td>8</td><td>1.4</td></tr> <tr><td>8500</td><td>2591</td><td>5</td><td>1.3</td></tr> <tr><td>10000</td><td>3000</td><td>2</td><td>0.9</td></tr> </tbody> </table>			High Speed Asymmetric				Reach ( Distance )		VDSL Rate ( Mbps )		feet	meters	Downstream	Upstream	250	76	195	105	500	152	182	98	1000	305	141	63	1500	457	93	45	2000	610	66	30	2500	762	53	12	3000	914	44	8	3500	1000	36	5	High Speed Symmetric				Reach ( Distance )		VDSL Rate ( Mbps )		feet	meters	Downstream	Upstream	250	76	190	110	500	152	180	105	1000	305	122	83	1500	457	84	50	2000	610	64	26	2500	762	53	10	3000	914	42	7	3500	1000	36	4	Long Reach Symmetric				Reach ( Distance )		VDSL Rate ( Mbps )		feet	meters	Downstream	Upstream	250	76	76	57	1000	305	74	49	2500	762	52	10	4000	1219	28	2	5500	1676	15	1.5	7000	2134	8	1.4	8500	2591	5	1.3	10000	3000	2	0.9
High Speed Asymmetric																																																																																																																																							
Reach ( Distance )		VDSL Rate ( Mbps )																																																																																																																																					
feet	meters	Downstream	Upstream																																																																																																																																				
250	76	195	105																																																																																																																																				
500	152	182	98																																																																																																																																				
1000	305	141	63																																																																																																																																				
1500	457	93	45																																																																																																																																				
2000	610	66	30																																																																																																																																				
2500	762	53	12																																																																																																																																				
3000	914	44	8																																																																																																																																				
3500	1000	36	5																																																																																																																																				
High Speed Symmetric																																																																																																																																							
Reach ( Distance )		VDSL Rate ( Mbps )																																																																																																																																					
feet	meters	Downstream	Upstream																																																																																																																																				
250	76	190	110																																																																																																																																				
500	152	180	105																																																																																																																																				
1000	305	122	83																																																																																																																																				
1500	457	84	50																																																																																																																																				
2000	610	64	26																																																																																																																																				
2500	762	53	10																																																																																																																																				
3000	914	42	7																																																																																																																																				
3500	1000	36	4																																																																																																																																				
Long Reach Symmetric																																																																																																																																							
Reach ( Distance )		VDSL Rate ( Mbps )																																																																																																																																					
feet	meters	Downstream	Upstream																																																																																																																																				
250	76	76	57																																																																																																																																				
1000	305	74	49																																																																																																																																				
2500	762	52	10																																																																																																																																				
4000	1219	28	2																																																																																																																																				
5500	1676	15	1.5																																																																																																																																				
7000	2134	8	1.4																																																																																																																																				
8500	2591	5	1.3																																																																																																																																				
10000	3000	2	0.9																																																																																																																																				

Long Reach Asymmetric			
Reach ( Distance )		VDSL Rate ( Mbps )	
feet	meters	Downstream	Upstream
250	76	78	16
1000	305	76	16
2500	762	52	10
4000	1219	28	2
5500	1676	15	1.5
7000	2134	8	1.4
8500	2591	5	1.3
10000	3000	2	0.9

<b>Power</b>	<b>eX-1S110</b>	<b>eX-4S110</b>
Input Supply Voltage	9 - 30 vDC, unregulated ( 12 vDC Nominal )	
Current	320 mA	370 mA
Power Consumption	3.8 watts	4.4 watts
Power Connectors	5.5mm x 9.5mm x 2.1mm barrel socket and 2 pin terminal Block	
<b>Power Adapter</b>		
Universal AC/DC adapter	100-240v AC, regulated 12V DC adapter included	
<b>Indicators</b>		
Power / TST	This green LED is turned on when power is applied to the Ethernet Extender. Otherwise it is off. The LED will blink when in Loopback test mode.	
CO - Local	Ethernet Extender is operating in CO VDSL mode	
CPE - remote	Ethernet Extender is operating in CPE VDSL mode	
ILNK	Indicates Link Status and activity on the Interlink (VDSL) port	
ETH	Indicates link status and activity on Ethernet port(s).	
<b>Switches</b>	<b>eX-1S110</b>	<b>eX-4S110</b>
Access	All switch settings are accessible through a side opening in the chassis	
Rate/Reach	Two switches enable the user to select the right balance between speed and distance for their environment.	
Signal to Noise Ratio	Selectable Signal to Noise Ratio (SNR) of 6dB or 9dB. The higher SNR number provides better impulse noise protection but lowers performance.	
Auto-Negotiation (802.3u)	<p><i>Enabled (Default)</i> - The Ethernet Extender uses 802.3u Auto-negotiation on the 10/100Base-TX interface. It is set to advertise full duplex.</p> <p><i>Disabled</i> - The Ethernet Extender sets the port according to the position of the speed and duplex switches.</p>	
Link Mode	<p><i>Standard (Default)</i> – The 10/100Base-TX link remains active independent of the state of the Ethernet link on its remote peer.</p> <p><i>Link Pass-Through</i>- the state of the 10/100Base-TX Ethernet connection is “passed through” or propagated across the VDSL link to the 10/100Base-TX Ethernet link on its remote Ethernet Extender peer. This enables a managed switch to report the state of the remote device to its network management system.</p>	N/A


Interlink Fault Feedback	<p><i>Enabled</i> - A loss of VDSL link will drop the 10/100 Ethernet port on each end until the link recovers</p> <p><i>Disabled ( Default )</i> – The state of the VDSL link is not propagated to the 10/100Base-TX port</p>	N/A
Loopback	<p><i>Enabled</i> - The VDSL interlink will perform a loopback function, retransmitting all received Ethernet frames back to its peer.</p> <p><i>Disabled (Default - Up)</i></p>	
Set Ethernet Speed (Port 1)	When Auto-Negotiation switch is disabled, fixed speed can be set 100 (Default) 10	
Set Ethernet Duplex (Port 1)	When Auto-Negotiation switch is disabled, Duplex can be set Full (Default) Half	
<b>Environmental Specifications</b>	<b>eX-1S110</b>	<b>eX-4S110</b>
Operating Temperature	0 C to 50 C (32 F to 122 F)	
Storage Temperature	minimum range of -25 C to 70 C (-13 F to 158 F)	
Operating Humidity	5% to 90% non-condensing	
Storage Humidity	5% to 95% non-condensing	
Operating Altitude	Up to 3,048 meters (10,000 feet)	
Heat Output ( BTU/HR )	13.1	15.2
MTBF (Hours)**	Without power adaptor: 468,351 With power adaptor: 289,015	365,542 207,212
<b>Mounting</b>		
Din Rail Kit	Optional	
Rack Mount Kit	Optional	
<b>Product Weight and Dimensions</b>		
Weight	0.3 kg, 0.66 lbs	0.47 kg, 1.04 lbs
Dimensions	120 x 80 x 26 mm, 4.7 x 3.1 x 1.0 inches	130 x 115 x 26 mm, 5.1 x 4.5 x 1.0 inches
<b>Packaging</b>		
Shipping Weight	0.55 kg, 1.2 lbs	0.75 kg, 1.7 lbs
Shipping Dimensions	170 x 260 x 70 mm, 6.7 x 10.2 x 2.8 inches	
<b>Regulatory Approvals</b>		
Emissions	FCC Part 15 Class A, EN55022 Class A	
	CISPR 22 Class A	
	EN61000-3-2	
Immunity	EN55024	
Electrical Safety	UL 60950-1	
	EN60950	
	CE	
Environmental	<a href="#">Reach, RoHS and WEEE Compliant</a>	
Other	ECCN: 5A991A	
	HTSUS Number: 8517.62.0050	
	Perle Lifetime warranty	

\*Available on 1 port models.

\*\*Calculation model based on MIL-HDBK-217-FN2 @ 30 °C


### Extend 10/100 Ethernet across Twisted Pair or Coaxial Wire

Extend an Ethernet link beyond the 100 meter ( 328 feet ) limit using Ethernet Extenders. Distances of up to 3 km ( 10,000 feet ) can be achieved over twisted pair Cat 5,6 or 7 cable.







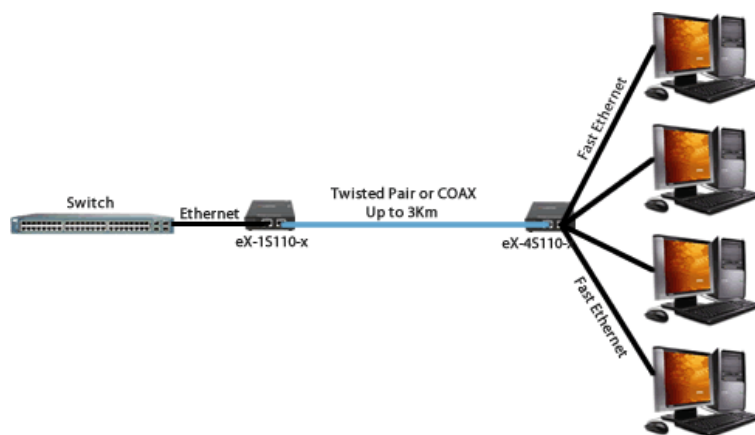







### Extend four 10/100 Ethernet ports across Twisted Pair or Coaxial Wire

Extend four Ethernet ports up to 3 km ( 10,000 feet ) over twisted pair Cat 5,6 or 7 cable.




\*Available on 1 port models.

	Description	Power Cord	Product Part Number
	<b>eX-1S110-RJ - Fast Ethernet Stand-Alone Ethernet Extender</b> - 1 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. RJ45 Interlink ( VDSL2 ) connector	USA	<a href="#">06003504</a>
		UK	<a href="#">06003501</a>
		EU	<a href="#">06003502</a>
		AUS	<a href="#">06003505</a>
		SA	<a href="#">06003506</a>
	<b>eX-1S110-BNC - Fast Ethernet Stand-Alone Ethernet Extender</b> - 1 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. BNC ( Coax ) Interlink ( VDSL2 ) connector	USA	<a href="#">06003514</a>
		UK	<a href="#">06003511</a>
		EU	<a href="#">06003512</a>
		AUS	<a href="#">06003515</a>
		SA	<a href="#">06003516</a>
	<b>eX-1S110-TB - Fast Ethernet Stand-Alone Ethernet Extender</b> - 1 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. 2-pin Terminal Block Interlink ( VDSL2 ) connector	USA	<a href="#">06003524</a>
		UK	<a href="#">06003521</a>
		EU	<a href="#">06003522</a>
		AUS	<a href="#">06003525</a>
		SA	<a href="#">06003526</a>
	<b>eX-KIT11-S110-RJ - Fast Ethernet Extender Kit</b> - 1 pair of eX-1S110-RJ Fast Ethernet Extenders	USA	<a href="#">06003804</a>
		UK	<a href="#">06003801</a>
		EU	<a href="#">06003802</a>
		AUS	<a href="#">06003805</a>
		SA	<a href="#">06003806</a>
	<b>eX-KIT11-S110-BNC - Fast Ethernet Extender Kit</b> - 1 pair of eX-1S110-BNC Fast Ethernet Extenders	USA	<a href="#">06003814</a>
		UK	<a href="#">06003811</a>
		EU	<a href="#">06003812</a>
		AUS	<a href="#">06003815</a>
		SA	<a href="#">06003816</a>
	<b>eX-KIT11-S110-TB - Fast Ethernet Ethernet Extender Kit</b> - 1 pair of eX-1S110-TB Fast Ethernet Extenders	USA	<a href="#">06003824</a>
		UK	<a href="#">06003821</a>
		EU	<a href="#">06003822</a>
		AUS	<a href="#">06003825</a>
		SA	<a href="#">06003826</a>
	<b>eX-4S110-RJ - Fast Ethernet Stand-Alone Ethernet Extender</b> - 4 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. RJ45 Interlink ( VDSL2 ) connector	USA	<a href="#">06003684</a>
		UK	<a href="#">06003681</a>
		EU	<a href="#">06003682</a>
		AUS	<a href="#">06003685</a>
		SA	<a href="#">06003686</a>
	<b>eX-4S110-BNC - Fast Ethernet Stand-Alone Ethernet Extender</b> - 4 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. BNC ( Coax ) Interlink ( VDSL2 ) connector	USA	<a href="#">06003694</a>
		UK	<a href="#">06003691</a>
		EU	<a href="#">06003692</a>
		AUS	<a href="#">06003695</a>
		SA	<a href="#">06003696</a>
	<b>eX-4S110-TB - Fast Ethernet Stand-Alone Ethernet Extender</b> - 4 port 10/100Base-TX (RJ-45) [100 m/328 ft.]. 2-pin Terminal Block Interlink ( VDSL2 ) connector	USA	<a href="#">06003704</a>
		UK	<a href="#">06003701</a>
		EU	<a href="#">06003702</a>
		AUS	<a href="#">06003705</a>
		SA	<a href="#">06003706</a>

	<b>eX-KIT44-S110-RJ - Fast Ethernet Extender Kit</b> - 1 pair of port eX-4S110-RJ Ethernet Extenders	USA	<a href="#">06003864</a>
		UK	<a href="#">06003861</a>
		EU	<a href="#">06003862</a>
		AUS	<a href="#">06003865</a>
		SA	<a href="#">06003866</a>
	<b>eX-KIT44-S110-BNC - Fast Ethernet Extender Kit</b> - 1 pair of port eX-4S110-BNC Ethernet Extenders	USA	<a href="#">06003874</a>
		UK	<a href="#">06003871</a>
		EU	<a href="#">06003872</a>
		AUS	<a href="#">06003875</a>
		SA	<a href="#">06003876</a>
	<b>eX-KIT44-S110-TB - Fast Ethernet Extender Kit</b> - 1 pair of port eX-4S110-TB Ethernet Extenders	USA	<a href="#">06003884</a>
		UK	<a href="#">06003881</a>
		EU	<a href="#">06003882</a>
		AUS	<a href="#">06003885</a>
		SA	<a href="#">06003886</a>

**Accessories:**

Accessories			
	4 DIN Rail Mount Bkt	DIN Rail Mounting Kit for 4 & 8 port IOLAN SDS/STS wall mount models, all Stand-Alone Media Converters and all Stand-Alone Ethernet Extenders. Two of these brackets are required for the 8 port STS8-D model.	<a href="#">04030840</a>
	MCSM	Standalone media converter wall / rack mount bracket	<a href="#">05059999</a>